


CHARACTERISTIC CURVES AND PERFORMANCE DATA

50 Hz n= 2900 min⁻¹

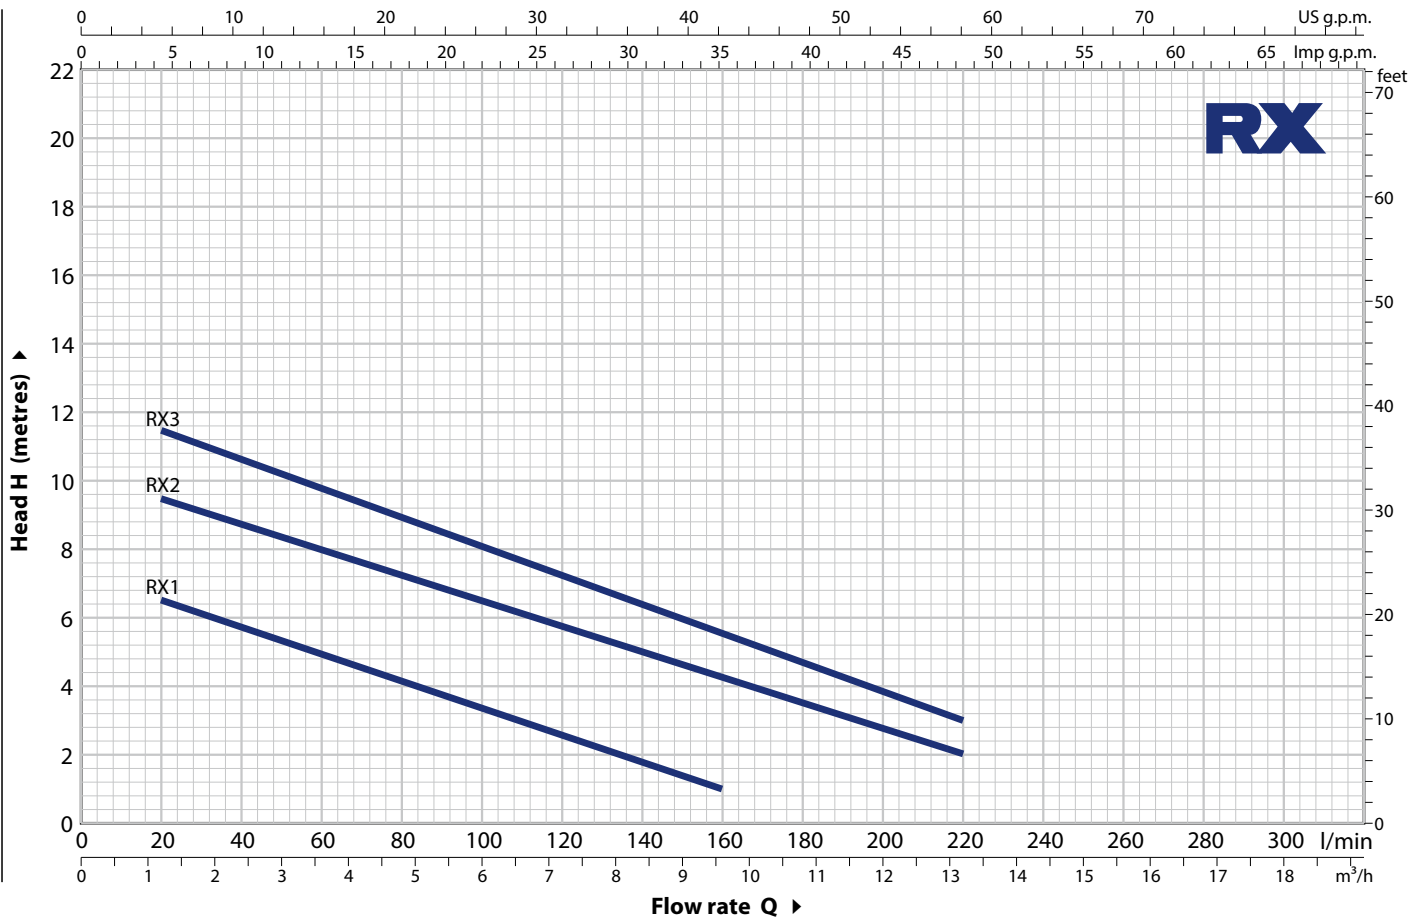

MODEL Single-phase	POWER (P ₂)		Q	0	1.2	3.6	6.0	8.4	9.6	12.0	13.2	15.6	18.0
	kW	HP		0	20	60	100	140	160	200	220	260	300
RXm 1	0.25	0.33	H metres	7.5	6.5	5	3.5	2	1				
RXm 2	0.37	0.50		10	9.5	8	6.5	5	4.5	2.5	2		
RXm 3	0.55	0.75		12	11.5	9.5	8	6.5	5.5	3.5	3		

Q = Flow rate H = Total manometric head

Tolerance of characteristic curves in compliance with EN ISO 9906 Grade 3B.