


2.2~7.5kW 4P
 TYPE T
 50Hz : 1450rpm

Specification

- Insulation class : F
- Protection class : IP68
- Water temperature : up to 40°C
- PH : 6 to 10
- Density of liquid : 1.3g/cm³
- Power supply : three phase 380V ±10%, 50Hz
- Motor protection : built in
- Capacity : up to 125m³/h
- Head : up to 16m
- Maximum immersion depth : 10m
- Cable Length : 8m

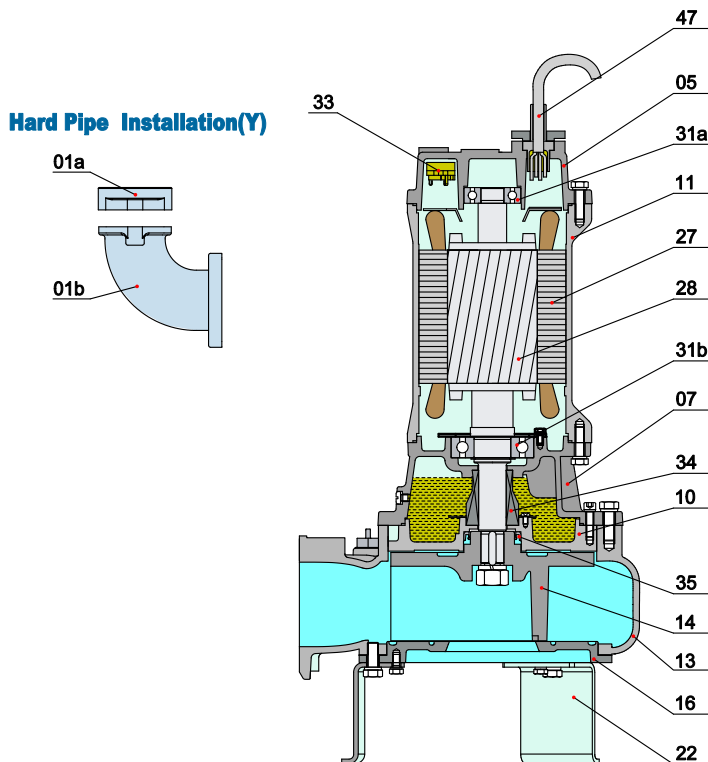

Materials of construction

| Item No. | Part name | Material |
|----------|---------------------|----------------------------|
| 01a | Hose coupling | Cast iron |
| 01b | Hose coupling | Cast iron |
| 05 | Upper cover | Cast iron |
| 07 | Bearing house | Cast iron |
| 10 | Seal bracket | Cast iron |
| 11 | Motor body | Cast iron |
| 13 | Pump body | Cast iron |
| 14 | Impeller | Cast iron/Tungsten carbide |
| 16 | Inlet plate | Ductile iron |
| 17 | Coupling adapter | Cast iron |
| 22 | Seat assembly | Steel |
| 22a | Coupling seat | Cast iron |
| 22b | Upper guide support | Cast iron |
| 27 | Stator | |
| 28 | Rotor | |
| 30 | Flange | Cast iron |
| 31a | Bearing | Ball bearing |
| 31b | Bearing | Ball bearing |
| 33 | Motor protector | |
| 34 | Mechanical seal | Sic-Sic/Carbon-Sic |
| 35 | Oil seal | |
| 47 | Cable | |