



Performance curves

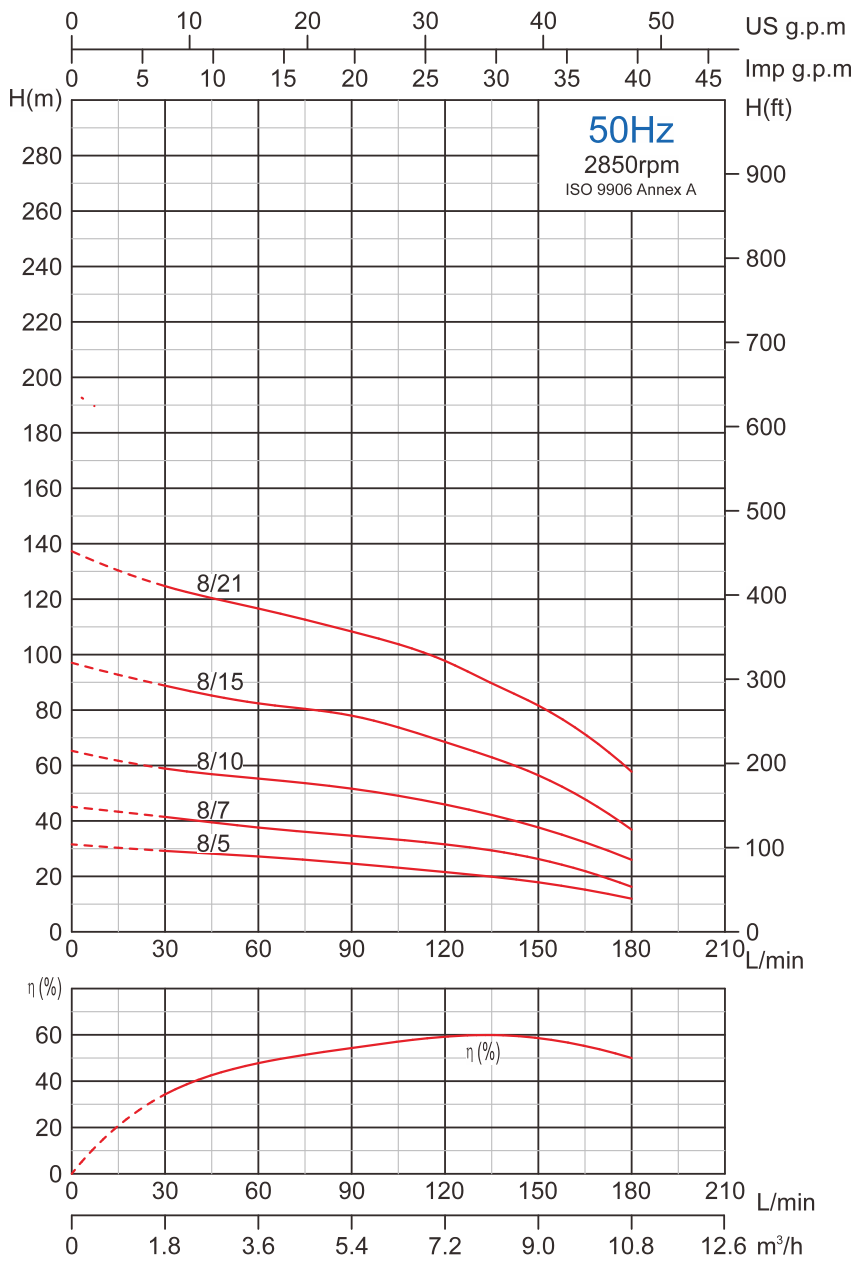

Dimensions & weights

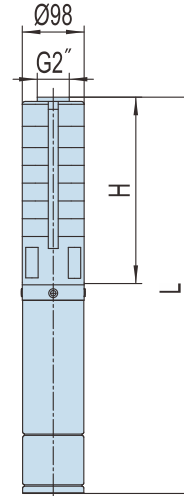

Single Phase	H (mm)	L (mm)	N.W kg	
			H	L
4SPM8/5	291	669	2.7	11.7
4SPM8/10	428	900	4.1	16.5

Three Phase	H (mm)	L (mm)	N.W kg	
			H	L
4SP8/7	346	753	3.2	12.9
4SP8/10	428	870	4.1	15.2
4SP8/15	566	1068	5.4	19.2
4SP8/21	731	1333	7.1	26.1

Performance table

Model(50Hz)		Motor Power		Capacity								
Single Phase	Three Phase			kW	HP	l/min	0	30	60	90	120	133
				m³/h	0	1.8	3.6	5.4	7.2	8	9	10.8
4SPM8/5	—	0.75	1	Head (m)	32	29	27	26	22	20	18	12
	4SP8/7				45	41	38	36	32	30	26	17
4SPM8/10	4SP8/10	1.5	2		65	59	55	52	46	43	38	26
	4SP8/15				97	89	82	78	68	64	56	37
—	4SP8/21	4	5.5		137	124	116	109	98	90	82	58