



4SP 5 DEEP WELL SUBMERSIBLE PUMP

Performance curves

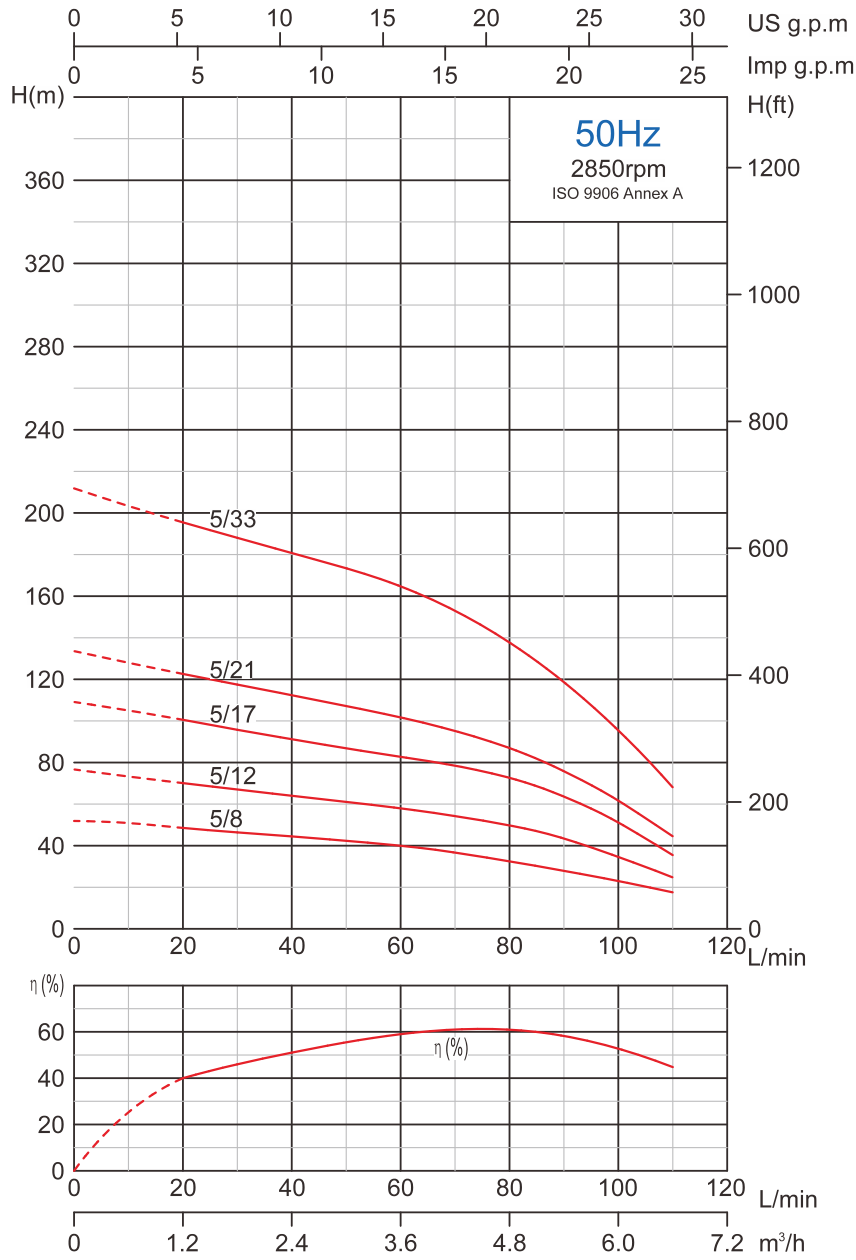

Dimensions & weights

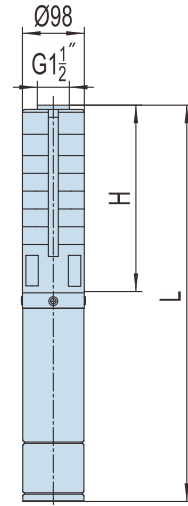

Single Phase	H (mm)	L (mm)	N.W kg	
			H	L
4SPM5/8	321	699	3.0	12.0
4SPM5/17	510	982	5.0	17.4

Single Phase	H (mm)	L (mm)	N.W kg	
			H	L
4SP5/12	405	812	3.9	13.6
4SP5/17	510	952	5.0	16.1
4SP5/21	594	1096	5.8	19.6
4SP5/33	846	1398	8.4	25.0

Performance table

Model(50Hz)		Motor Power		Capacity											
Single Phase	Three Phase			l/min	0	20	30	40	50	60	70	80	90	100	110
		kW	HP	m³/h	0	1.2	1.8	2.4	3.0	3.6	4.2	5.0	5.4	6.0	6.6
4SPM5/8	-	0.75	1	Head (m)	51	47	45	44	42	40	37	32	28	23	17
-	4SP5/12	1.1	1.5		76	71	68	66	63	59	55	48	43	35	25
4SPM5/17	4SP5/17	1.5	2		109	100	96	93	89	84	78	68	61	50	35
-	4SP5/21	2.2	3		134	124	118	113	107	100	94	83	75	62	44
-	4SP5/33	3	4		211	194	187	180	172	163	152	132	118	96	69